

Professional M1 Luxmeter

The M1 Luxmeter is a high precision and reliability instrument for measuring interior and exterior illuminances in accordance with EN Norm 13032.

Characteristics

- ▶ Sturdy, easy to handle and use
- ▶ The device is designed for use by lighting designers, architects, engineers and experts in the lighting sector
- ▶ Maximum resolution: 0.01 lx
- ▶ Particularly suitable for measuring illuminances in roads, tunnels and exterior areas
- ▶ Automatic battery-saving turn-off function
- ▶ The M1 Luxmeter can also be used with a special adaptor to measure luminances.




Photocell and Luxmeter

The photocell consists of a silicon diode whose response corresponds to the CIE $V(\lambda)$ relative visibility curve using the full-filtering method.

The photocell is connected to the luxmeter by means of a 3 meter shielded cable.

Photocell – Luxmeter System Characteristics (In accordance with EN 13032 - CIE 69 - DIN 5032/6)

| | |
|---|-----------|
| ■ Acquisition Area Diameter | 8 mm |
| Configuration M1-01 Class L | |
| ■ Correspondence to $V(\lambda)$ f_1 'Curve | < 1.5% |
| ■ Directional Response Error f_2 | < 1.5% |
| Configuration M1-02 Class A | |
| ■ Correspondence to $V(\lambda)$ f_1 'Curve | < 2% |
| ■ Directional Response Error f_2 | < 1.5% |
| Configuration M1-03 Class A | |
| ■ Correspondence to $V(\lambda)$ f_1 'Curve | < 3% |
| ■ Directional Response Error f_2 | < 1.5% |
| ■ Linearity Error f_3 | < 0.1% |
| ■ Display Unit Error f_4 | < 0.1% |
| ■ Fatigue f_5 (measured at 10 lx) | < 0.2% |
| ■ Modulated Light f_7 | < 0,1 % |
| ■ Polarization f_8 | < 1% |
| ■ Scale Change Error f_{11} | < 0.1% |
| ■ Temperature Coefficient α | 0.1% / °K |
| ■ Sensitivity to UV (u) | < 0.1% |
| ■ Sensitivity to IR (r) | < 0.1% |
| ■ Conversion Ratio | > 3/s |
| ■ Integration Period | ms 100 |

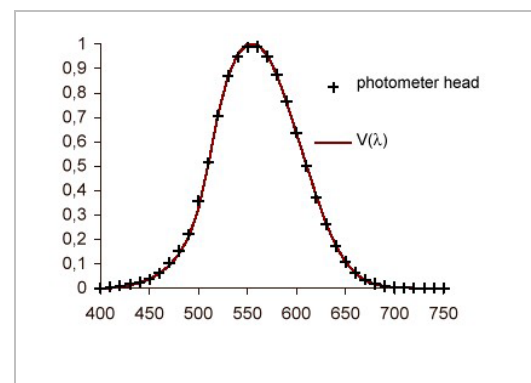

Professional M1 Luxmeter

Technical Data

| | | | |
|-------------------------------------|--|--------------------|------------------|
| ▪ Photocell | Silicon diode with V(λ)-Filter and cosine correction | | |
| ▪ Photocell temperature coefficient | 0.2% / K | | |
| ▪ Functions | <ul style="list-style-type: none">▪ Automatic or manual selection of measurement field▪ Visualization in lux (lx) / lux (fc) (alterable)▪ Hold Function▪ Max Function for visualization | | |
| ▪ Measurement Field | <ul style="list-style-type: none">▪ 0.01 ... 19 900 lx / 0.001 ...1,999 fc or▪ 0.1 ... 120 000 lx / 0.01 ... 12 000 fc | | |
| ▪ 5 Scales | MB | 0.01 - 19 900 lx | 0.1 - 120 000 lx |
| ▪ Resolution | 1 | 0.01 lx / 0.001 fc | 0.1 lx / 0.01 fc |
| | 2 | 0.1 lx / 0.01 fc | 1 lx / 0.1 fc |
| | 3 | 1 lx / 0.1 fc | 10 lx / 1 fc |
| | 4 | 10 lx / 1fc | 100 lx / 10fc |
| ▪ Luminance | Possible to measure luminance by means of special adaptor with the following measurement field: | | |
| | 1 - 1 999 000 cd/m2 | | 0.1 - 199 900 fL |
| ▪ Measurement frequency | Approx. 2.5 measurements per second | | |
| ▪ Display | 3 ½ figures with LCD type display | | |
| ▪ Connection Cable | The connection cable between the instrument and photocell is approximately 3 m long (optional 10 m on request with surcharge) | | |
| ▪ Batteries | 1.5 V, alkaline-manganese (IEC LR 6) | | |
| | Autonomy approx. 75 hours (2500 measurements) | | |
| ▪ Dimensions | Instrument: 65 x 120 x 19 mm | | |
| | Photocell: Ø 34 mm x 21 mm | | |
| ▪ Weight | 190 g without battery | | |
| ▪ Note | The instrument comes supplied with leather holder or in protective plastic box (holder for luminance adaptor extra) | | |